

# **Installation Guide**

# Important Notice

Failure to read/adhere to Sync EV's Installation Guide and incorrectly completing Sync EV's Warranty Process will void the 3 Year Extended Warranty.

Please ensure to visit the below link to complete your warranty. https://www.evchargepoints.co.uk/warranty-registration-page-installers/



#### Introduction

### THE SYNC

This guide is intended for use by competent electrical installers to explain basic requirements and options to be considered when



installing a SYNC charger. The SYNC is designed for installations in or outside, the advanced safety technology we have built into the unit ensures its safe usage, this guide provides information to assist when installing the EVCP-7KW-T2-1PH:32A. This guide should not be used for any other EVSE.

### **Important Safety Information**

Warning! The SYNC EV EVCP-7KW-T2-1PH:32A

is manufactured to be safe without risk provide they are installed correctly, used, and maintained in accordance with the manufacturers recommendations and installed by a competent electrical installer in accordance with national and local regulations and legislation applicable at the time of installation, eg: BS7671:2018 amendment 1.

The SYNC EV unit is designed to be connected to one dedicated AC supply only. The property must comply with BS7671 standards before the installation commences. As the SYNC EV unit has a built Type A RCD (Optional) with 6mA DC protection we recommend that the circuit at source is installed on a 40A B Type MCB.

Important note: A DC Leakage fault in the vehicle may "blind" a type "AC" RCD and render it ineffective, never feed any EVSE from an upstream Type "AC" RCD.

### Locating the

#### SYNC EVCP-7KW-T2-1PH:32A

The SYNC unit can be installed inside and outside, the installer should consult with the EV owner to establish their preferred installation location. This should take into consideration the length of the owners charging cable and risk of vehicle impact etc.

It is recommended the SYNC unit be installed at a height of between 600mm-1.4m. Note: buildings regulations BS8300:2018 recommends 500mm-1500mm.

#### **Technical Details**

The SYNC unit is designed to meet the following European standards: IEC61851-1 edition 3 (2017), Low Voltage Directive (LVD) 2014/35/EU and EMC Directive2014/30/EU. During manufacture each SYNC unit has been functionality tested for safety using BS EN 61010 & BS EN 61557 approved equipment. The SYNC unit is a Class I/II rated device for 230V / 400V AC 50Hz systems and is IP54 rated. This installation guide is in accordance to the latest BS7671: 2018 Technical details.

### **Earthing Arrangements**

The new SYNC EV EVCP-7KW-T2-1PH:32A features an on-board safety monitoring system to detect low or high voltage supplies and potential earth-neutral faults, this in accordance with regulation 722.411.4.1 (iv) of BS7671 2018 (Compliant on single phase supplies only). If such a condition is encountered the charge cycle is ended or prevented and the SYNC unit flashes red and



effectively becomes a double insulated (class II) device.

The vehicle becomes isolated from incoming supply and poses no risk to touch. This feature removes the requirement for an earth electrode where it may be ineffective or introduce further risk. The SYNC unit may be connected directly to a TN-C-S (PME) earthing system without any special arrangements.

It remains the responsibility of the installer to conduct a risk assessment of the immediate area to a range of 10 Meters (equipotential zone) to ensure no other conductive metal fixings pose risks (mixture of TT/TN-Sand TN-C-S), this is important where cable length may enable charging inside or outside of a building/ garage where the vehicle is within touch distance. Where certain conditions dictate an earth electrode must be used it shall be independent from the distributors earth system with no direct interconnection (the incoming supply SWA protective earth should be isolated from the housing and/ or earth electrode). The electrical installer shall install a suitable electrode complete with termination housing and covers where appropriate, warning labels should be visible and close to the unconnected SWA protective earth (eq inside the SYNC unit). The earth connection shall be made from the electrode to the SYNC unit via copper conductor earth wire of an appropriate CSA for the installation. The earth wire shall be installed in conduit where there is a risk of mechanical damage or UV exposure.

Additional note: SYNC EV recommend Earth electrode impedance to be <100ohms

#### SURGE PROTECTION

Guidance on requirements for surge protection devices given In BS7671: section

443. The SYNC unit is protected against transient over voltages (+/-2kV Line-Earth and +/-1kV Line-Line as a requirement of EN 61000-6-1), a direct lightning strike carries a current of 30~ 200kA the SYNC EV units' internal protection would provide little or no protection in such an event. likewise nor would an SPD rated less than 30kA. If life support equipment or business operations could be affected by a lightning strike central SPD protection is advised if it does not already exist. The guidance on risk calculation in section 443.5 of BS7671 in most cases is not possible due to unknown location of any SPD already fitted, length of cables to calculate LP etc., it Is therefore recommended a common sense approach is used on choice of SPD (or if required).

### Isolation and Switching for Safety and Maintenance

To ensure that the SYNC unit can be "turned off" to enhance security and enable maintenance activities, a double pole isolator (or 2 pole RCBO) suitably rated must be installed within the customer's property. An isolator switch is a mandatory requirement for "new builds", but optional for existing dwellings (at customer's request), the switch should be mounted at a height of between 500mm and 1500mm above finished floor level to comply with regulations. The switch should be rated at 45 amps. All installations must comply to BS7671: 2018 regulations.



#### Installation Procedure

The SYNC unit has been designed as a wall mounted device. The installer should confirm that the wall that the unit is intended to be fixed to is structurally appropriate for the mounting of the SYNC unit. The installer should identify the construction of the wall and identify the correct and appropriate fixings to use.

- The Installer has a duty of care to ensure that the SYNC unit is securely attached to the wall or structure where the unit is intended to be operated from.
- NOTE: If any groundworks are required (cable trenching or earth electrode fitment) it is advisable to check if underground services could be present before commencement, plans may be available at: linesearchbeforeudig.co.uk (free to domestic users)
- Once the location and height of the SYNC unit has been decided. We advise that the installer predrill a 4mm holes in ONLY the 4 circles in the back box shown in the picture below. IMPORTANT: Please use washers provided for all 4 screws.

 Before drilling commences ensure that the installation wall has been checked for electric cabling or pipework with a suitable detector.

# Drilling the holes for the electrical supply cable entry

The electrical supply to the SYNC unit may be fed from 2 directions; the unit can accept supply cable entry on either the bottom left or via rear entry. The pre-drilled 20mm hole is for the output cable ONLY. For rear entry drill a 25mm hole for the grommet which is supplied and **must** be used. For bottom entry also use the grommet or a 25mm compression gland. If a SWA cable is to be used, then please use a lock ring on the outside of the unit between the gland and the charger. Then be careful the PCB is not damaged when fitting the front cover of the charger. Any damage will void the warranty.


Cable entry holes should not be drilled anywhere other than shown in the

image shown. This is strictly prohibited and will void the warranty of the unit.

(Consult SYNC EV for guidance on separate data cable entry)





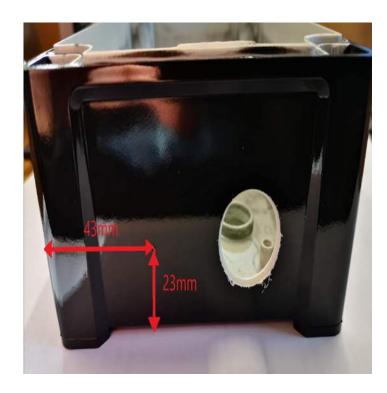







Important note: The installer MUST separate the front of the charger from the back box before drilling cable entry holes to avoid damaging the charger's components and PCB.

Once cable entry hole is safely drilled and screw holes predrilled then insert the supplied grommet so the cable grip pyramid is inside the enclosure. As shown below.

# Wiring Up the EVCP-7KW-T2-1PH:32A

When connecting to the SYNC unit the terminal blocks are clearly labelled.

LIVE = L

NEUTRAL = N

EARTH = Earth symbol

IN = SUPPLY CABLE

OUT = SYNC EV TYPE 2 CHARGING CABLE

Please ensure you follow these correctly to prevent any damage to the charger or components.

SYNC EV recommend using **EV Ultra CAT 5E** cable on installs which require a CT clamp to use the units dynamic load management capabilities. Please see info at:

http://www.doncastercables.com/ cables/1 7/77/EV-Ultra/Power-and-dataconnectivity-combined-in-one-cable/







All of the cables that are to be connected into the supply terminals should have their insulation stripped back 8~12mm or ferrules used when appropriate to provide good contact to the screw terminal jaws, torque settings for these connections are 1.5Nm.

Appropriate pull tests shall be performed at the unit connections to confirm the installation is sound.

# CONNECTING THE FRONT OF THE CHARGER

Once all supply connections are made and appropriate electrical dead testing is carried out. Please carefully insert the Sync EV Mode 3 charging cable into the pre-drilled 20mm hole. Use the supplied 20mm gland and ensure only 10mm of outer insulation is protruding into the enclosure. Connect L, N & E in OUT. IMPORTANT: The red cable and CP connector is insert so the red cable is closest to the earth terminal.



# DYNAMIC LOAD MANAGEMENT INSTALLATION

Please see installation videos for guidance, these can be found in the installer portal at <a href="https://www.syncev.co.uk/installer-portal.aspx">www.syncev.co.uk/installer-portal.aspx</a> password is "Installer1234"

#### **Final Electrical Testing**

To meet the BS7671 (18th edition) requirements for testing of an electrical installation, the following tests and checks shall be performed by a competent electrical installer before during and after a SYNC unit is installed:

- A visual inspection of the installation including the existing electrical installation.
- -Verification of the characteristics of the electrical supply at the origin of the installation to confirm the supply is suitable for the additional load.
- A test to confirm the continuity of the circuit protective conductors.
- A test to confirm the integrity of the circuit insulation resistance.
- A test to confirm the polarity of the installation is correct.



- Where applicable a test to confirm the earth electrode resistance is within acceptable tolerances (or)
- An earth loop impedance test A test of the mechanical operation of residual current devices (RCD's)
- A test to confirm the operation of residual current devices (RCD's) is within stipulated timescales (at the rated current and at five times the rated current operating current.)
- A test or calculated measurement of the prospective fault current.
- A verification of the functional operation of the SYNC unit. An electrical installation certificate must be completed.

#### Important Information

SYNC EV do not authorise the use of ANY In cable adaptors, charging cables used should not have any modifications made to them. If there is evidence of damage to the charging connector(s) or cable it should not be used for safety reasons.

#### WIFI Connection Guide

### Connecting to the Internet

Upon powering the Sync EV unit, the status indicator light will show Yellow. This indicates that the health of the charging unit is good but there is no connection to the Sync EV Network.

In order to connect to the network, please connect your device to the Sync EV WIFI network.

#### Password SEV-1234

In your web browser, please enter the following web address –

https://192.168.4.1/index.html

You will be presented with a screen that indicates "the connection is not private".

An "Advanced" or "Show details" button will show, select this, and accept the risk to proceed to the website. This does **not** create any risk to your device. The unit will indicate connection with an audio beep.

The chargers settings screen should then be shown. (If the page doesn't load, please check your connection with the Sync EV hotspot).

Then follow the instructions on the next page.



#### **Network Setup**

Select the Network Configuration Tab from the left-hand menu and the following screen will load.



Select Ethernet/WIFI/GPRS from the main network interface menu, ensure connection to the Sync EV network and select Apply.

You will then be prompted to restart the unit. Click Restart Now.


The unit will beep to indicate this has been completed.

If you selected Ethernet and your unit is connected to a CAT5/6 Network and/or a SIM card installed/setup, the indicator light will be Blue to confirm connection to the Sync EV Network.

### Setting up WIFI Details

Once the unit has restarted, refresh the page and scroll down to Wireless Interface.

SSID is the name of the WIFI network you are trying to connect the Sync EV unit to. This will be case sensitive and must be typed exactly to match as displayed on the house internet router.



Please use your smart device to ensure WIFI signal is strong in the position where the unit has been fitted.

Password is the WIFI networks password, again please type this in exactly as displayed. Special characters are forbidden. Ensure connection to the Sync EV network then.

Click Submit, Select Restart Now.

After 15 seconds, the Yellow Indicator should turn Blue to confirm connection to the Sync EV Network.



### **GSM** enabled charging points

If installing a GSM activated Sync EV charger then it is extremely important to check the following:

After the charger has connected to the network follow the "Connecting to the internet" section on a previous page.

Once on the "Network Configuration" page, please locate the "GSM Interface". Under this heading a RSSI reading is shown. For the Sync EV charger to perform reliably this figure must be 15 or above.

### Sync EV Smart App

You now need to inform your customer to download the Sync EV App.

Available on both Apple and Google Play stores.

Android https://play.google.com/store/apps/details?id=syncev.co.uk

i Phone https://apps.apple.com/gb/app/ sync-ev/id1528884639

Once downloaded, please register an account. The units QR Code ID & Pin Code can be foundon the charge point identification card enclosed within the units packaging.



### **Trouble Shooting Guidelines**

Please further information or to refer to our FAQs, please visit

#### www.syncev.co.uk

The status of the Charging Unit can be identified by referencing the colour shown on the Halo LED indicator. See below –

#### Solid Yellow

Indicates unit has power but is not connected to the Sync EV Network.

#### Flashing Yellow

Indicates charging session has ended successfully and/or vehicle battery is fully charged.

#### Flashing Amber / Red

Indicates Suspended EV. This means the Vehicle is rejecting charge due to a Schedule being set in the car

#### Solid Blue

Indicates unit has power and is connected to the Sync EV Network.

#### Flashing Blue

Indicates vehicle is connected and unit is awaiting instruction for operation. (Scheduled start time or manual start via Smart App.)

### Solid Green (Slight pulse)

Indicates vehicle is currently in charging program.

#### Alternate Green and Blue

Indicates unit is in scheduled charging mode.

#### Red

Indicates unit is in fault mode.

Potential causes.

Charger has lost CPC (Supply Earth)

Internal RCD has tripped.

Cable entry point drilled in incorrect location, causing damage to PCB when charger face has been attached.

Vehicle fault.

#### Flashing Red

Indicates OVER or UNDER voltage.

Over 253v or Under 207v





For customer support use the "Call back" function on our website or email using the details below.



Installer support please use the telephone number provided in the installer portal.