

EV Meter Pay²

A smart level-2 public charging station designed for hotels, shopping centers, parking lots, workplaces, municipalities and more...

This universal charging station is equipped with a built-in card reader that accepts every major payment method including debit and credit cards, digital wallets, QR codes, prepaid, NFC and more. EV Meter's smart, secure and feature-rich solution enables businesses to take initiative and maximize their revenue.



High-Performance

Maximum 22kW power output



Open Payment System

Accept any type of payment method



24/7 Monitoring

Real-time event notifications and remote software updates



Easy Installation

Quick to deploy in any location





Dual Port

Allow two cars to charge simultaneously and maximize profit



OCPP Supported

Manage the charging station by using EV Meter Core or any other management platform

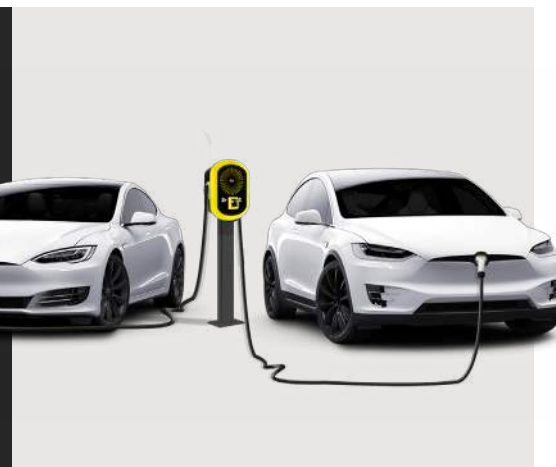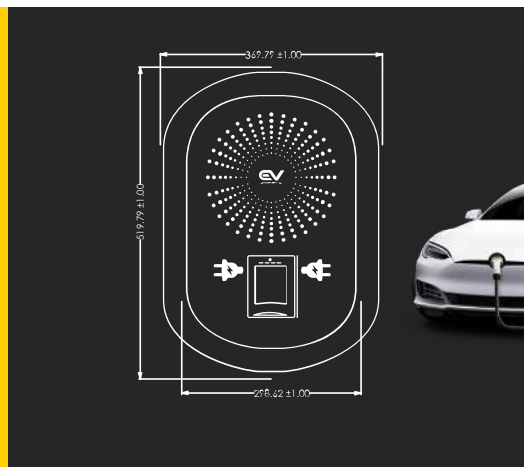

EV Meter Pay²



Electrical Data	AC Power Supply AC Input Voltage AC Output Voltage Maximum Input / Output Current Maximum Input / Output Power Number of Sockets	3P + N + PE 380-400 VAC +/-10%, 50-60Hz Two 380-400 VAC +/-10%, 50-60Hz 2*(3x32A) 2X22Kw Two
Communication	Interface Protocol Server Communication	OCPP 1.6 Supported Ethernet, 4G
Supported Payment Schemes	Debit & Credit Cards Mobile & NFC Payments Prepaid cards & closed environments Static and Dynamic QR codes	Swipe, contact, contactless, EMV chip cards Google Pay, Apple Pay, Swish and more Alipay, WeChat Pay and others
Safety & Protections	Safety Protections Power Limit Control Type 2 Socket Protection Available Connections	Electronic RCD 30mA AC Electronic 6mA DC Fault current detection Mode 3 PWM control according to IEC 61851-1 IEC 62196-1, IEC 62196-2 Type 2 Socket or 5m Cable with Plug
Enclosure & Environmental Conditions	IP Rating Enclosure protection rating Payment Terminal Impact Protection Enclosure Material Operating Temperature Ambient Temperature Storage Status LEDs Light Beacon Built-in Energy Meter	IP55 IK10 IK6 PC + UV (-25°C) to (+55°C) (-30°C) to (+70°C) Yes RGB color indicator Yes
Weight & Dimensions (WxHxD)	Socket	365x520x266 mm, 15kg
Standards & Certifications	ROHS REACH CE Compliant	
Optional Devices	Type 2 Socket Protection Dynamic Load Management Pedestal	Shutter Yes Yes