

# Installation Guide

# HookStop



- 1** Remove tile directly under and surrounding the roof hook to be fitted




- 2** Replace the tile directly under the roof hook with the HookStop and nail to the roof batten with 2 appropriate roofing nails



- 3** Secure hook in place over HookStop



- 4** Replace tiles

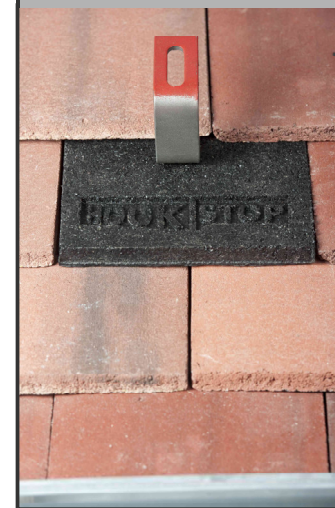

Visit our website and see how it's done in real time action, by scanning the QR code. You can download QR readers from App Store.

[www.hookstop.co.uk](http://www.hookstop.co.uk)

