



Datasheet ValkPitched - Clamp for tiled roofs

Technical specifications

- Standard hooks for portrait, and twist hooks for landscape panel mounting.
- Thanks to height adjustability in de roof hook, profiles can be mounted in a straight line.
- All roof hooks are made of stainless steel.
- Pre-mounted with hammerhead bolt and surruration nut.
- Side mounting for easy and fast installation.
- Special screws with special tip for strong fixation.

Article overview


Standard roof		
USP	High flexibility thanks to three-way adjustability of the hook	
Article number	747844	
Description	Stainless steel roof hook - adjustable side	
Strength	855 N	
Adjustability top	27 mm	
Adjustability bottom	13 mm	
Adjustability width	50 mm	
Min. batten distance	65 mm	
Article number	747845	
Description	Stainless steel roof hook - adjustable side twist	
Strength	855 N	
Adjustability top	27 mm	
Adjustability bottom	13 mm	
Adjustability width	50 mm	
Min. batten distance	65 mm	

Fixation material


Torx-screw		
USP	Special tip and thread for easy and strong fixation	
Article number	773360	
Description	Stainless steel torx-screw T30	
Measurements	5,5 x 58 (thread: 36 mm)	

Measurements

Art. nr. 747844

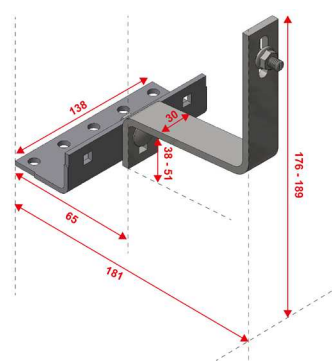

Art. nr. 747845



CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS

Van der Valk Solar Systems + International
 Westernesse 18 - 2635 BG Den Hoorn, The Netherlands
 +31 174 25 49 99
sales@valksolarsystems.com

Valk Solar Systems UK + IE
 +44 1304 89 76 58
sales@valksolarsystems.co.uk

Valk Solar Systems Ibérica
 +34 699 326 544
ventas@valksolarsystems.es

Valk Solar Systems Nordics
 +46 7 24 41 60 82
sales@valksolarsystems.se