



NEW

Contactless payment terminal models with upgraded steel panels and faster installation.

ROLEC

BASICCHARGE

Intelligent EV charging pedestal



Designed &
Manufactured
in the UK

BASICCHARGE

Intelligent EV charging pedestal

The BASICCHARGE is a simplistic and affordable EV charging pedestal. This versatile charger's integrated LED amenity lighting also provides greater visibility of the charging bays and surrounding areas.

This future-proof OCPP compliant pedestal can offer a simple plug & charge or pay-to-charge solution via the EV driver's smartphone and/or RFID card/fob through any chosen OCPP back-office management system.


Feature-rich, this EV charger supports dynamic load balancing and is equipped with PME fault detection, so there is no requirement for an earth rod, reducing installation costs.

Available in 1way or 2way versions, providing up to 22kW superfast charging.



Product features

- Plug & go, app, contactless payment (model dependant), or RFID controlled charging
- Choose from 1x or 2x universal charging socket(s)
- Up to 7.4kW or 22kW charging output(s)
- PME fault detection (no earth rod required)
- Supports dynamic load balancing & static load management
- OCPP 1.6 compliant (integrates with any chargepoint management system)
- Over-the-air firmware / software updates
- Built-in AC overload & fault current protection (RCBO)
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notifications
- Cable lock security feature (can be permanently locked by owner)
- LED amenity lighting head (Photocell controlled)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- Conforms with PAS 1899 accessible charging standard (model dependant)
- Strong and durable IP54 / IK10 rated
- Surface or root mountable
- OZEV grant fundable (UK only)
- Designed & manufactured in the UK

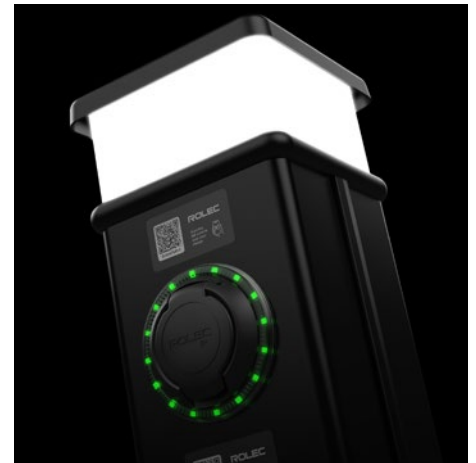

OCPP 1.6 compliant

Ability to integrate with any OCPP compliant chargepoint management system and app.



Easy to operate

Three quick and easy ways to operate: mobile app, RFID cards and fobs or plug & charge.



Funding options available

Speak to us about flexible EV infrastructure investment opportunities.



4G / Wi-Fi / Ethernet enabled

Complete with secure 4G, Wi-Fi and Ethernet connectivity, ensuring chargers are always online 24/7.



Branding & colour options available

Rolec offers a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps.



No earth rod required

Equipped with built-in PME fault detection, saving installation time and costs.

The details

UP TO 22kW

Available in both single phase and three phase models, providing up to 22kW superfast charging.

BASICCHARGE is compatible with all EVs & PHEVs, charging at the fastest speed possible, ensuring vehicles are ready to go in no time.

2 WAY CHARGING

The BASICCHARGE is available in 1way and 2way versions, allowing up to two vehicles to charge simultaneously, using just one EV charging pedestal.

The perfect EV charging pedestal solution for fleet, workplace and private car park requirements.



ACCURATE BILLING

Built-in MID-approved energy metering ensures accurate consumption reporting, which is essential for businesses and residential car parks, wishing to bill for their usage. Use our back-office management platform to generate revenue by setting your own tariffs.

SAFE AND SECURE

Rest assured, ROLEC's entire EV chargepoint range is fully UK Smart Charge Point Regulation compliant.

Over-the-air updates allow the chargers to receive the very latest features, ensuring a safe and future-proof product 24/7.

3 YEAR WARRANTY

ROLEC EV chargepoints are designed, developed and manufactured in the UK and come with a 3 year warranty included as standard, for added peace of mind on your investment.

Specifications

Product Overview


	Connection Type	Charging Output	Input Supply	Unit Colour	Additional Features	Product Code
Single Phase Units	1x Universal charging socket	Up to 7.4kW (32A)	1x Up to 32A Single Phase* 230V AC (±10 %) 50/60Hz	 Black	Contactless payment terminal	ROLEC1511B
					None	ROLEC0211B
	2x Universal charging sockets	Up to 7.4kW (32A) per socket	1x Up to 63A Single Phase* 230V AC (±10 %) 50/60Hz	 Black	Contactless payment terminal	ROLEC1521B
					None	ROLEC0221B
Three Phase Units	1x Universal charging socket	Up to 22kW (32A)	1x Up to 32A Three Phase* 400V AC (±10 %) 50/60Hz	 Black	Contactless payment terminal	ROLEC1513B
					None	ROLEC0213B
	2x Universal charging sockets	Up to 22kW (32A) per socket	1x Up to 63A Three Phase* 400V AC (±10 %) 50/60Hz	 Black	Contactless payment terminal	ROLEC1523B
					None	ROLEC0223B

*Should supply be limited, chargepoint(s) can be configured to any output (min. 6A)


Specifications

Unit Dimensions


BasicCharge standard 1way unit:

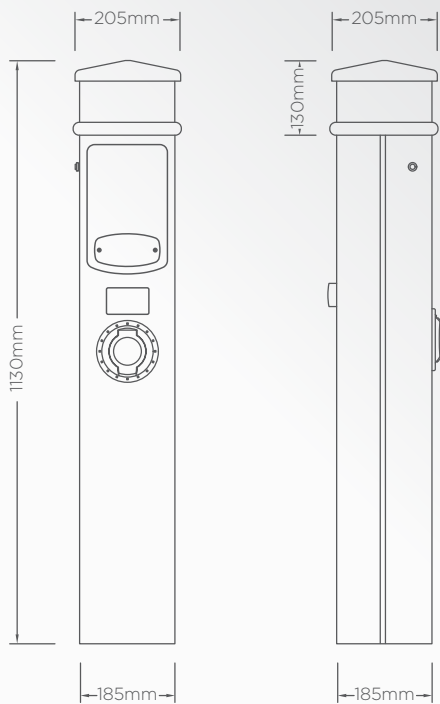


BasicCharge standard 2way unit:

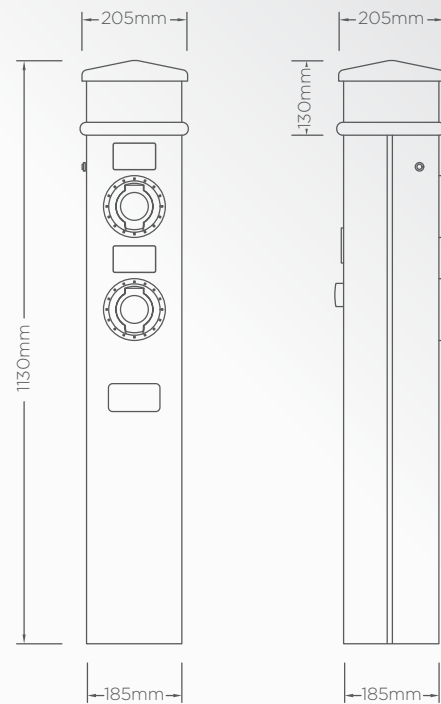

BasicCharge including contactless payment terminal:

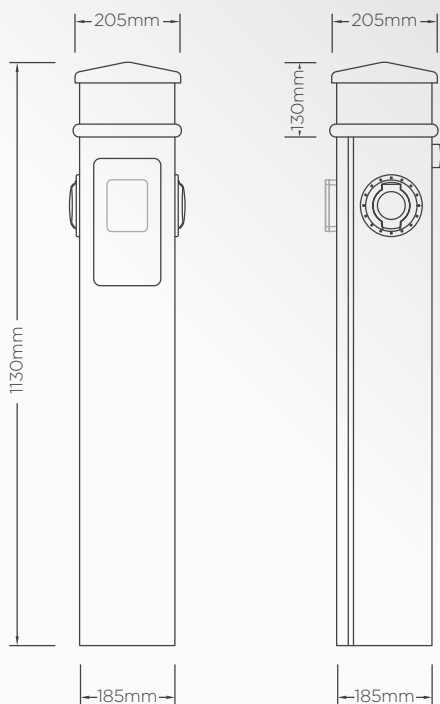

Ground mounting base:

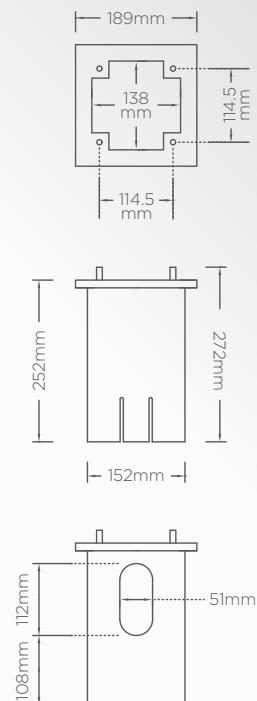

Specifications

Technical Data

User Interface	• Mobile app • Contactless card payment terminal (EMVCo. L1 v3.0 Certified) (model dependant) • RFID reader (ISO14443 A & B (T=CL), Desfire EV2/3 & Mifare Classic protocols) • NFC (ISO18092) • RFID reader (MIFARE ISO/IEC 14443 A) (model dependant) • Plug & go • RGB LED status indicator halo(s) – configurable
Charge Protocol	Mode 3 (IEC 61851-1)
Built-in Protection	• AC overload & fault current protection – 40A 30mA Type A RCBO (per socket) • DC fault protection – 6mA • Lightning surge, over temperature protection • PME fault detection – No earth electrode/rod required • Supports automatic dynamic load balancing (may require additional hardware) • Supports static load management (software configurable)
Required External Protection	• Over current protection – A suitably rated MCB or Type-A 30mA device is to be installed at source (dependent on cable type and/or route) • Surge Protection – May be required depending on the installation
Cable Terminals	• Single Phase – 3x 50mm 1P + N + E • Three Phase – 5x 50mm 3P + N + E
Communications	• 4G LTE Cat-1 (built-in nano SIM, subscription required) • LTE FDD: B1/B3/B5/B7/B8/B20/B28 • GSM: B2/B3/B5/B8 • Wi-Fi 802.11 b/g/n 2.4 GHz (2412-2472 MHz / 2422-2462 MHz) • NFC 13.56 MHz • RJ45 Ethernet connection • Bluetooth Low Energy (BLE 4.1) 2402-2480 MHz (for installer configuration purposes) • OCPP 1.6J • Cyber security – Data encryption level TLS 1.2
Energy Metering	Integrated Class 1 MID compliant metering
Amenity Lighting	• 360° Low energy LED • Rating – 2x G9 2.3W LED, 230-240V AC • Colour temperature – 5000k • Protection – 6A 30mA Type A RCBO
Standby Power Consumption	• Charging circuits – < 7.5W (per socket) • Panel heater – 8W • Lighting – 4.6W
Dimensions	205mm x 1130mm x 205mm (W x H x D)
Weight	< 15kg (model dependant)
Environmental	• Ingress protection – Enclosure IP65, Socket IP54 • Impact protection – IK10 • Security – Dual tamper and breach notifications • Operating temperature – -30°C to +50°C • Operating humidity – 5% to 95%
Materials	• Substructure – Hot-dipped Galvanised Steel • Panels – 3.2mm Aluminium composite • Heavy duty 1.5mm Steel applied with 45-55 microns of Zinc primer (models with contactless payment terminal) • Lens – High impact resistant 3mm Polycarbonate • Lid/collar – ABS Granulate Natural Polyethylene
Unit Colour	● Black ● ○ Grey & White (model dependent) ● Other colours available upon request
Certifications & Compliances	• EV Charging Compliance – EN 61851-1:2019, EN 61851-22:2002 • Smart Charge Points – (SI 2021/1467) • Wiring Regulations – BS 7671:2018+A2:2022 • EMC Compliance – EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091, (EN 301 489-1 V1.9.2, EN 301 489-3 V2.1.1, EN 301 489-17 V1.3.1, EN 301 489-19 V2.1.1, EN 301 489-52 v1.1.0)^P • Safety Compliance (LVD) – EN 62368-1:2014, 2014/35/EU, SI 2016/1101, EN 60950-22:2006^P • Communications / RED – EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.2.1 (2018-07), (EN 301 908-2 V13.1.1, EN 303 413 V1.1.1)^P • Environmental Protection – BS EN 60529:1992+A2:2013 • Impact Rating – BS EN 62262:2002+A1:2021 • Metering – 2014/32/EU, SI 2016/1153 • Accessibility – PAS 1899 accessible charging standard (model dependent) • RoHS – 2011/65/EU, SI 2012/3032 • REACH – 1907/2006, REACH etc. (Amendment) Regulations 2021 • Payter Payment Device – CE, FCC, RoHS, WEEE, REACH, EMVCo, PCI-PTS 6.x, TQM, MasterCard, VISA, American Express, Discover, Diners^P • Certification Markings – CE & UKCA
Warranty	3 years



Options & accessories

Product Code	Item Description
RFID0010	RFID card
RFID0020	RFID fob
GMCP0010	Ground mounting base for BasicCharge pedestal
EVCB0020	Root mount protection barrier - 48mm
EVCB0040	Surface mount protection barrier - 48mm
EVPS0010	EV parking sign - A4 landscape (Other sizes are available)
ROLEC5000	TAP & CHARGE remote payment terminal
EVPP0100	5m 32A Type 2 to Type 2 charging cable
EVPP0107	10m 32A Type 2 to Type 2 charging cable
EVPP0105	5m 32A Three phase Type 2 to Type 2 charging cable
EVPP0108	10m 32A Three phase Type 2 to Type 2 charging cable (Other cables are available, including Type 1 options)
ACSR0525	Perific Max Fuse Protection Device with 3x 900A up to 36mm ² Current Sensors
ACSR0535	Perific Max Fuse Protection Device with 3x 900A up to 100mm ² Current Sensors
ACSR0545	Perific Max LAN Accessory Input Kit
ACSR0125-F	100A up to 35mm ² screened CT clamp with 10m cable & connector





GMCP0010



RFID0020



ACSR0535

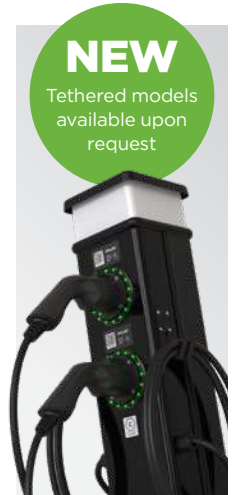**NEW**Tethered models
available upon
request

EVCB0040



EVPP0100



TAP & CHARGE Remote payment terminal

Hassle-free transactions across multiple EV chargers. Ideal solution for commercial and public locations.

ROLEC5000




Branding & colour options available

ROLEC offer a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps. This can be arranged at time of order. Contact ROLEC for details.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

Chargepoint management & operation

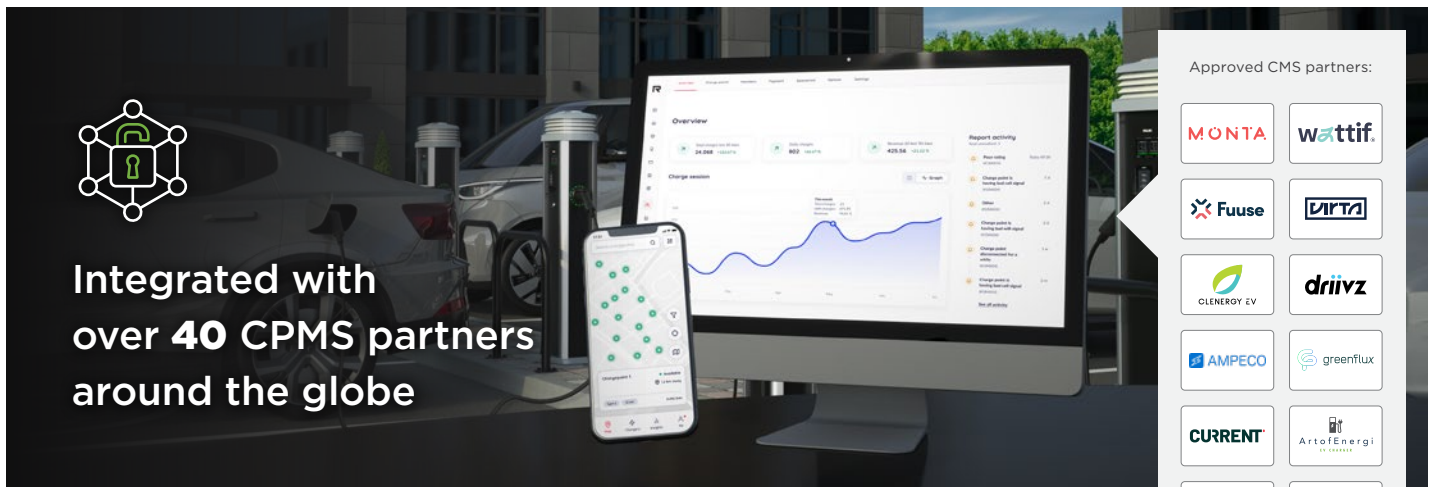

Integrated with over 40 CPMS partners around the globe

Approved CMS partners:

- MONTA
- wattif
- Fuuse
- VIRTA
- CLENERGY EV
- drivz
- AMPECO
- greenflux
- CURRENT
- ArtotEnergi
- connekt
- Spirii
- ROAM
- NOR+HE
- STUART ENERGY
- wevo
- ChargePanel
- MOBILITY 46
- RE&GO
- + many more



Chargepoint operators

ROLEC EV chargepoints boast an array of intelligent features. When combined with any approved OCPP compliant chargepoint management system (CPMS), chargepoint operators will have the ability to deploy and self-manage their own public and/or private EV charging network. Ideal for workplace, fleet, commercial and residential locations.

-  Businesses can easily manage their own network of chargepoints
-  Conveniently set chargers to be private or publicly accessible
-  Offer pay-to-charge solutions and benefit from generating additional revenue
-  Set custom & flexible tariffs for different customer or charger groups
-  Access advanced features including dynamic load management (DLM)
-  Users can operate chargepoints via mobile app, RFID, contactless payment (model dependent), or a remote contactless payment terminal (contact ROLEC for more information about the TAP & CHARGE solution)
-  24/7 support for users and operators of the chargepoints



NEED ADVICE?

Speak to a member of the team to find the right solution for you



Chargepoint users

Take full control of your EV charging experience and maximise the intelligent features of the chargepoint management system.

-  Remotely control your home EV charging via mobile app
-  Prioritise lower costs, lower CO₂ or only using renewable energy
-  Schedule charges so your car is ready when you are
-  Easily locate and navigate to public chargepoints via the road map
-  24/7 support for help when you need it most



Please Note: All chargepoint management and operation features are subject to the specified CPMS



THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.
The latest version of this publication can be downloaded at www.rolecserv.com/downloads-ev-charging

Illustrations of the product and user interface are for marketing purposes only.

Brand names, logos and trademarks used herein remain the property of their respective owners.
This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

© 2025 by Rolec Services Ltd. All rights reserved.
EVBD-V03-R0 BasicCharge Data Sheet



ROLEC

t: 01205 724754
e: enquiries@rolecserv.co.uk
www.rolecserv.com

